


SOILS

— THE TOUGHEST —
PERFORMER
« FOR YOUR FIELD »

26

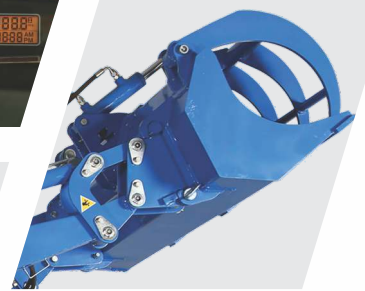

RELIABLE MECHANICAL
TRACTOR

POWER PACKED
ENGINE

TWIN PROJECTOR
HEADLAMPS

AGRI, IND & TURF
TYRE OPTION

REINFORCED SAFETY
FEATURES



COST
EFFICIENT
MECHANICAL TRACTORS

MADE OF
REAL
STEEL

STRATEGIC
COLLABORATION
WITH
YANMAR

**THE TOUGHEST
PERFORMER
FOR YOUR FIELD**

S 26

SOLIS



| FEATURES | S 26 |
|-----------------------------|------------------------------|
| Model Description | SOLIS-26 |
| ENGINE | |
| Engine Type | Mitsubishi 3 Cylinder |
| HP Category | 26 |
| No. of Cylinders | 3 |
| Aspiration | Natural |
| Cubic Capacity (cc) | 1318 |
| Rated RPM (+/-25mm) | 2700 |
| Air cleaner | Dry |
| Cold Start | Yes |
| Max Torque (Nm) | 76.3 |
| Exhaust | Underhood Downdraft Silencer |
| TRANSMISSION | |
| Drive | 4WD |
| Clutch | Single Clutch |
| Gearbox | 6F+2R |
| Front Axle | 4WD |
| Transmission | Sliding Mesh |
| SPEED (FORWARD) | |
| Maximum Speed (Km/Hr) | 15.58 @ 2700 |
| Minimum Speed (Km/Hr) | 1.67 @ 2700 |
| BRAKES | |
| Brakes | Oil Immersed Brakes |
| Type of actuation | Mechanical |
| Parking Brake | Independent |
| DIFFERENTIAL LOCK | |
| Differential lock | Yes, Foot Operated |
| PTO | |
| PTO (rpm) | 540, 1000 |
| PTO (actuation) | Mechanical |
| STEERING | |
| Steering | Power |
| ELECTRICAL | |
| Battery | 12V, 65Ah |
| Type of Actuation | 12V, 42Amp |
| Parking Brake | Yes |
| HYDRAULICS | |
| 3 point linkage | Cat-I |
| Stay Bars | Anchor Chain |
| Auxiliary hydraulic circuit | 1DA |
| Lift rods | Yes |
| Litre per minute(LPM) | 12 |

| FEATURES | S 26 |
|--|--|
| SAFETY SWITCH | |
| Clutch Safety Switch | Yes |
| PTO Safety Switch | Yes |
| Neutral Safety Switch | Yes |
| CAPACITY (LTRS)(+/-5%) | |
| Fuel tank (Lit) | 26.5 |
| TURNING RADIUS | |
| Without Brakes (m) | 2.7 |
| TYRE | |
| Front | 6.00-12 |
| Rear | 8.30-20 |
| DIMENSION & WEIGHT(+/-5%) | |
| Weight(kg) | 960 |
| Wheel Base (mm) | 1560 |
| Total Length (mm) | 2725 |
| Total Width (mm) | 1058 |
| Height (mm) Up to ROPS | 2127 |
| Min Ground Clearance (mm) | 255 |
| Front Track (mm) | 894 |
| Rear Track (mm) | 825 |
| OTHERS | |
| Fuel Indicator gauge | Yes |
| Front Toe Hook | Yes |
| Front & rear weights with std. Ballast | Front weights-15x2 |
| Trailer Hitch | 1. Clevis Hitch 2. Swinging Drawbar (Optional) |
| ROPS | Yes |
| OPTIONAL FEATURES | |
| Tyres | TURF TYRES: Front Tyre - 23x8.50-12 Rear tyre - 33x15.50-16.5 INDUSTRIAL TYRES: Front tyre- 23x8.50-12 Rear tyre- 33x15.50-16.5 |