

AMONG TOP **5 TRACTOR**MANUFACTURERS
GLOBALLY\*



NO. 1 TRACTOR EXPORTER FROM INDIA



EMINENT PRESENCE IN 140+
COUNTRIES



WORKFORCE OF 5,500+ DEDICATED EMPLOYEES WITH 400+ ENGINEERS IN R&D



JOINT VENTURE WITH YANMAR (JAPAN)

#### **INTERNATIONAL TRACTORS LIMITED**

International Business Office: Teri School of Advanced Studies, Plot No.10, Institutional Area, Vasant Kunj, New Delhi-110070 (India) Phone: +91 11 66 45 5200 | Work: Jalandhar Road, Hoshiarpur - 146022, Punjab (India) | Phone: +91-01882-522220/ 522221 Fax: +91-01882-522222 | Email: info@solisworld.com | URL: www.solistractors.com







750 KG HIGH LIFTING CAPACITY



POWER PACKED STAGE V ENGINE



REMASTERED TRANSMISSION WITH

SIDE SHIFT LEVERS

FRICTION-LESS AERODYNAMICS
& LED PROJECTION LIGHT BONNET



SIDE SHIFT GEAR LEVERS ENABLE EASY OPERATIONS







### A MIGHTIER ENGINE

With our powerful engine, you can count on us to get to the top with absolute precision. The engine of Solis S26 Side Shift is powered by user-friendly and nature-friendly features that truly translate to power on the field!



3 CYLINDER DIESEL ENGINE



HIGH BACK UP TORQUE



LOW MAINTENANCE



#### SMOOTHER TRANSMISSIONS

The transmission potential of Solis S26 Side Shift stands at par with global standards. With the in-built speed precision features you can work efficiently in the field and unlock productivity easily.



MECHANICAL TRANSMISSION FOR SPEED PRECISION




HI-LOW SPEED:



SLIDING MESH TRANSMISSION WITH 6+2 SPEED



SIDE SHIFT GEAR LEVER FOR COMFORT

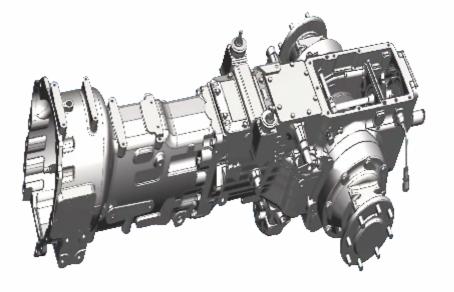



### A MASSIVE LIFTING CAPACITY

This Agri professional elevates the user potential with its high lifting capacity thereby enabling ease of farming with excellent results.



EFFICIENT HYDRAULIC PUMPS



THREE POINT



SMOOTH LIFTING







# A USER-FRIENDLY APPROACH TO AERODYNAMICS

In addition to improving user comfort, Solis S6 Side Shift boasts a sleek, stylish bonnet.



SLEEK & STYLISH BONNET



EASY TO OPEN WITH GAS STRUT





## SUPERIOR SAFETY FEATURES

We have reinforced safety features on this farm champion so that you can experience safer farming.



OPC (OPERATOR PRESENCE CONTROL)



TIMEOUT ALARM



HAZARD WARNING



FENDER MOUNTED LEFT HAND CONTROL



SAFETY SHUT DOWN WITH PTO ENGAGEMENT





## INNOVATIVE TECH RANGE

Designed for long-lasting performance in fields, the Solis S26 Side Shift brings an efficient and innovative design into action!



BATTERY CUT-OFF SWITCH



INDEPENDENT PARKING BRAKE



## COMPLETE CONTROL FOR COMPLETE FARMING

The latest Agri-champion tractor boasts a sideshift gear system, which has been designed to deliver a smooth farming experience. In addition to this, this gearing mechanism not only makes transmission simple and straightforward but also helps the operator work with complete control in all manoeuvres.





FEATURES	\$26 XC
ENGINE + 134	
Engine Type	3 Cylinder Diesel Engine
HP Category	26
No. of Cylinders	3
Aspiration	Naturally
Cubic Capacity (cc)	1319
Rated RPM (+/-25mm)	2500
Air Cleaner	Dry with Clogging Sensor
Cold Start	Standard
Max Torque (Nm)	76.3
Exhaust	Silencer in the Engine Compartment, Downward Discharge
TRANSMISSION 🂾	
Drive	4 WD
Clutch	Single Clutch
Gearbox	6 Forward + 2 Reverse
Front Axle	4WD
Transmission	Sliding Mesh
SPEED (FORWARD) / 🏋	
Maximum Speed (Km/Hr)	16.2@2815 Fly Up
Minimum Speed (Km/Hr)	1.64@2500 rated
BRAKES 🚳	
Brakes	Oil Bath Brake
Type of Actuation	Mechanical
Parking Brake	Independent
Differential Lock	
Differential Lock	Yes, Foot Operated
PTO <b>-</b>	
PTO (rpm)	540, 1000
PTO (actuation)	Mechanical
STEERING 🛇	
Steering	Power Steering
ELECTRICAL 🕙	
Battery	12V, 65 Ah
Alternator	12V, 42 A
Seven Pin Trailer Socket	Standard
HYDRAULICS O-	
3 Point Linkage	Cat 1-N
Stay Bars	Anchor Chain
Additional Hydraulic Circuit	1 DA
Hydraulic Lifting Capacity	750 Kg
Lift Rods	Standard
Litre per Minute (LPM)	13,5

FEATURES		\$26 XC		
SAFETY SWITCH				
PTO Safety		Standard		
Neutral Safety Switch		Standard		
Clutch Safety Switch		Standard		
CAPACITY (LTRS)(+/-5%	<b>6)</b>			
Fuel Tank (Lit)		28		
TURNING RADIUS 👈	(			
Without Brakes (m) as per Standard Tyres		3.18 (RHS), 3.10 (LHS)		
TYRE				
Front		6.00-12		
Rear		8.30-20		
DIMENSION & WEIGHT(	(+/-5%) 🗟			
Weight (Kg)		1070, 1265 with Cabin		
Wheel Base (mm)		1560		
Total Length (mm)		2760		
Total Width (mm)		1075 (max) - 1055 (min)		
Height (mm) Up to ROPS		1955		
Min Ground Clearance (mm)		240		
Front Track (mm)		885		
Rear Track (mm)		835		
OTHERS \cdots				
Fuel Indicator Gauge		Standard		
Front Tow Hook		Standard		
Front & Rear Weights with std. Ballast		Front weights - 2 x 15 Kg		
Trailer Hitch		Drawbar / Optional Towbar		
ROPS		Yes		
OPTIONAL FEATURES <sup>®</sup> ▶				
Cabin Option		Yes		
Tyres				
The state of the s				
Radial Agri: Front   Rear	Turf: Front I Rear	Ind: Front I Rear	GALAXY PRO	
6,5/80-12 280/70 R18	23x8.50-12 33x15.5-16.5	23x8,50-12 33x15.5-16.5	FRONT 220/55R12 REAR 280/70R16	
Front Loader		YES optional		

Data and specifications are subject to change without any advance notice due to continuous productions and development. All dimensions are with standard types.